
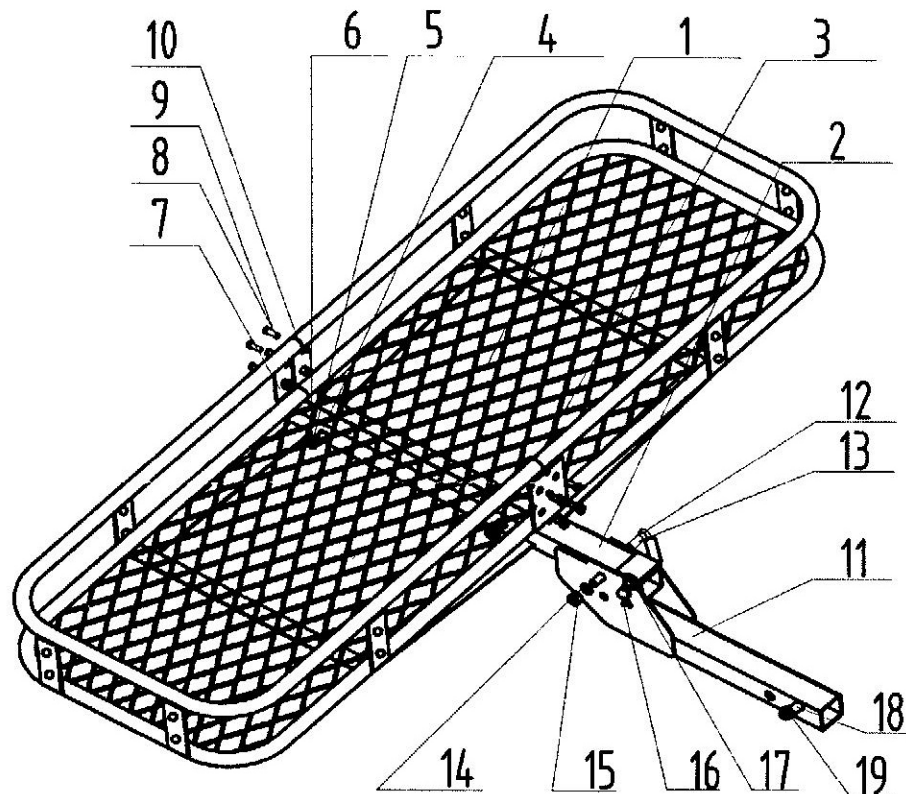


FOLDING.HITCH MOUNT CARGO CARRIER INSTALLATION INSTRUCTIONS



20	Plug		1	
21	Fixed plate		1	
22	U-bolt		1	

SPARE PARTS LIST

NO	NAME	PHOTO	QTY	SIZE
1	Basket		1	
2	Square tube		1	50x50mm
3	Tube		2	
4	Screw		2	M12x80mm
5	Flat gasket		2	φ12
6	Locknut		2	M12
7	Fixed plate		2	
8	Screw		8	M10x25mm
9	Flat gasket		8	φ10
10	Locknut		8	φ10
11	Legs		1	
12	Screw		1	M12x80mm
13	Tube		1	φ16x1.5x7
14	Flat gasket		1	φ12
15	Locknut		1	M12
16	lock PIN		1	φ12
17	B spring		1	φ3
18	Screw		1	M12x80mm
19	locknut		1	M12

WARNINGS

Never Exceed Your Vehicle Manufacturer's Recommended Towing Capacity

WARNINGS

Do not exceed maximum weight capacity of 500 lbs.
Distribute the weight evenly on platform when hauling a load.
Do not put all weights at a end.
Note: this is carrier is not intended for transporting people.
Don't carry loads wider or deeper than carrier.
Do not carry flammable items on carrier.
Do not allow exhaust fumes to blow directly on racks, this is a fire hazard.