



# INSTALLATION INSTRUCTION FOR TRUCK BED TAILGATE EXTENDER




1. Expand the schematic.

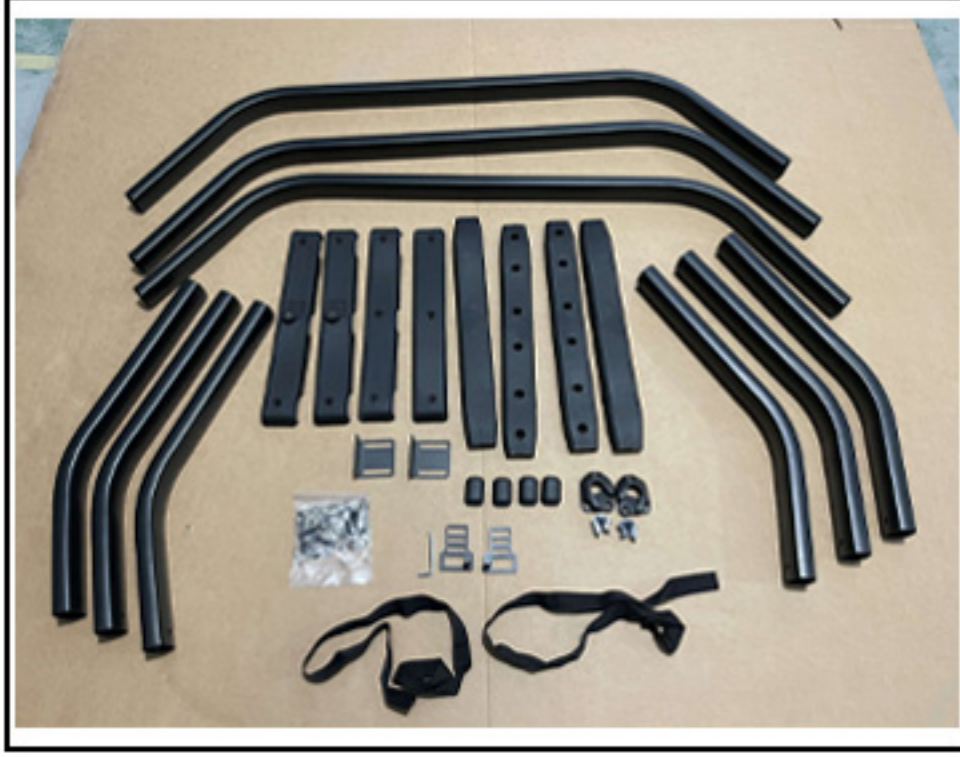


2. Measure the distance between the two ends of the car, insert the middle pipes into the elbows at both ends, and adjust them to a proper distance

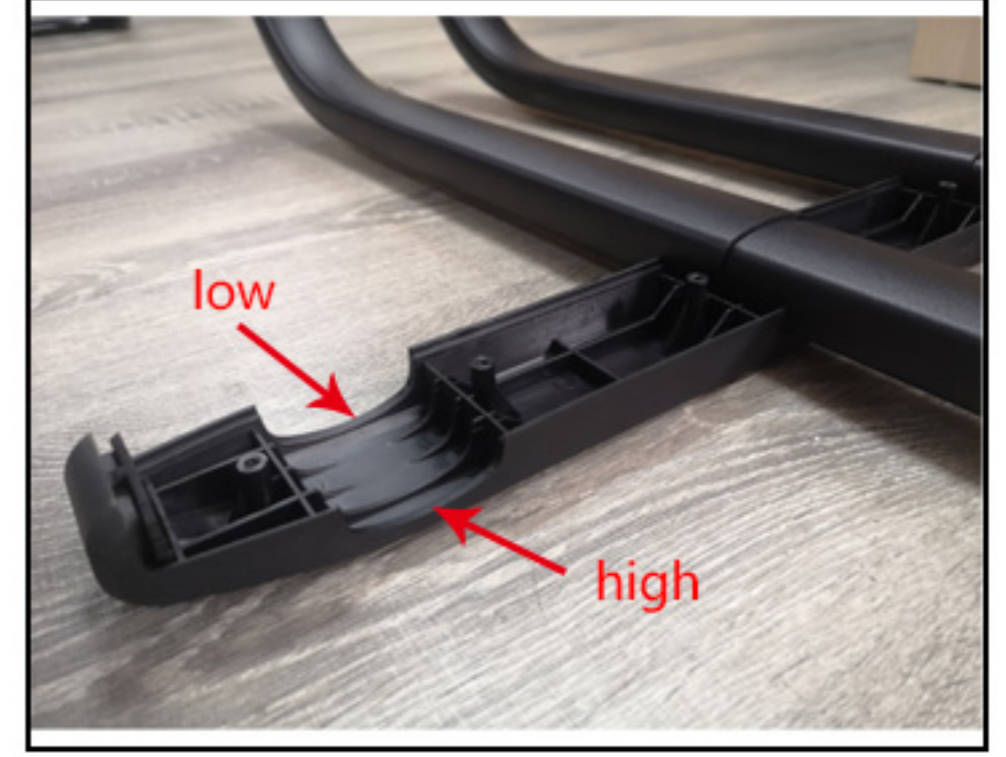

3. As shown in the picture, Place the tube on the bracket, Bracket notches are high or low, the lower side is stuck on the elbow, and the higher side is stuck on the straight pipe

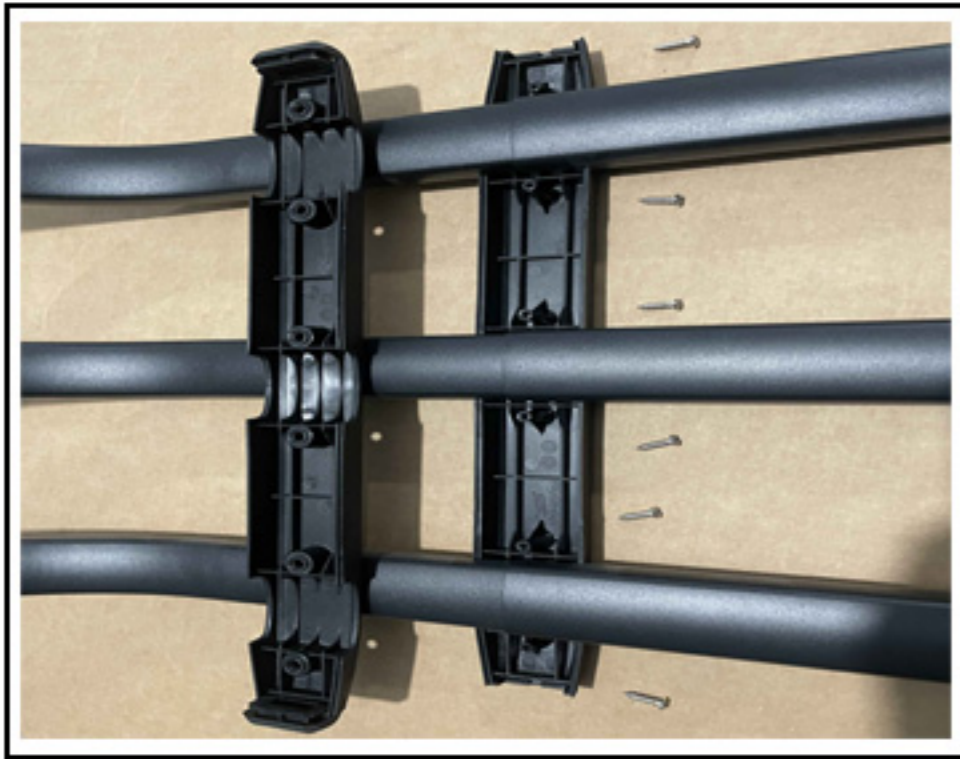

4. Adjust the seam of the pipe into the bracket

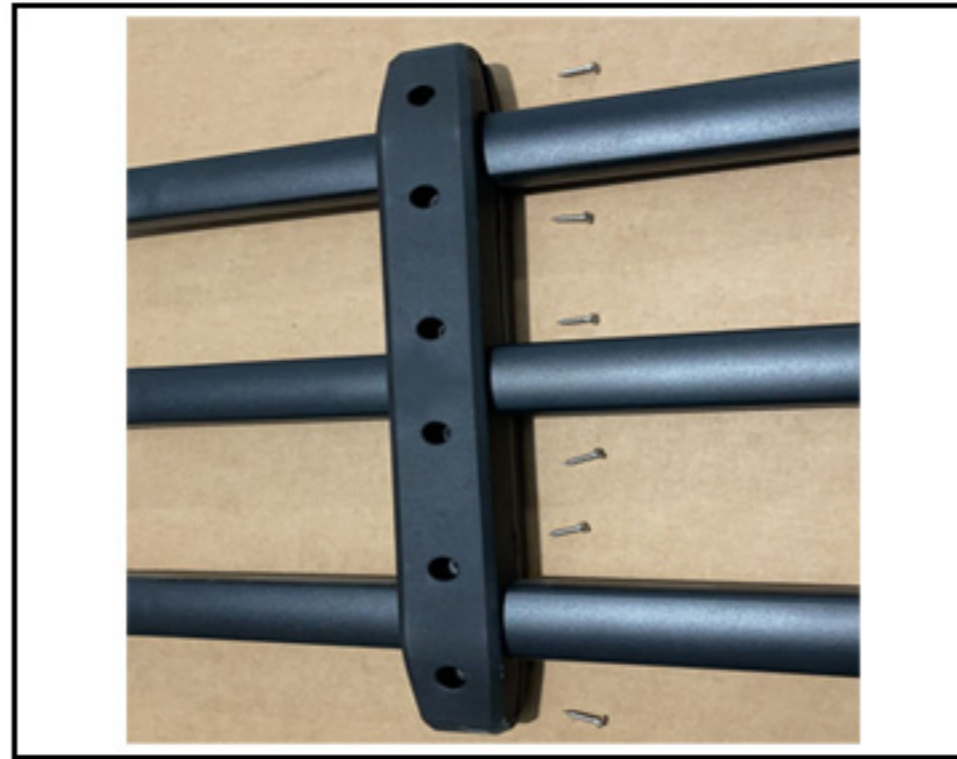

5. Assemble the hole on the other side and lock it with screws



6. Pass the rope into the middle elbow and do the same at the other end



7. As shown in the figure, install the brackets at both ends, match the brackets with the holes, use long screws in the middle, and short screws at both ends.



8. As shown in the picture, Match the other half of the bracket to the hole, use an electric drill to tighten the middle screw



9. As shown in the picture, put the nut on the outside and tighten the screw on the inside



10. The installation is complete



11. Stick the fixed position on the place where the expansion rack is installed, and punch holes according to the hole positions.



12. Put the bracket 1 into the corresponding hole, insert the screw, and lock it firmly.



13. As shown in the figure, match bracket 2 to the hole of bracket 1, and insert the screw.




14. Lock and fix.




15. As shown in the figure, erect the expansion frame, and the side corresponds to the bracket 2.



16. Push into the bracket 2.

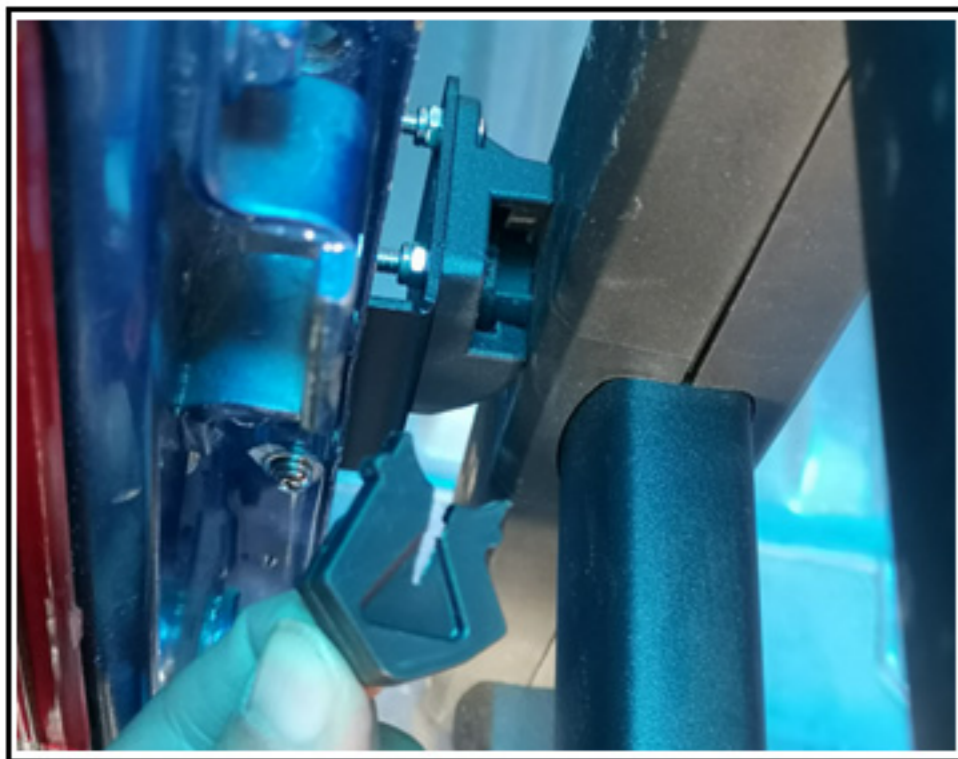

17. Snap the cover into the bracket 2.

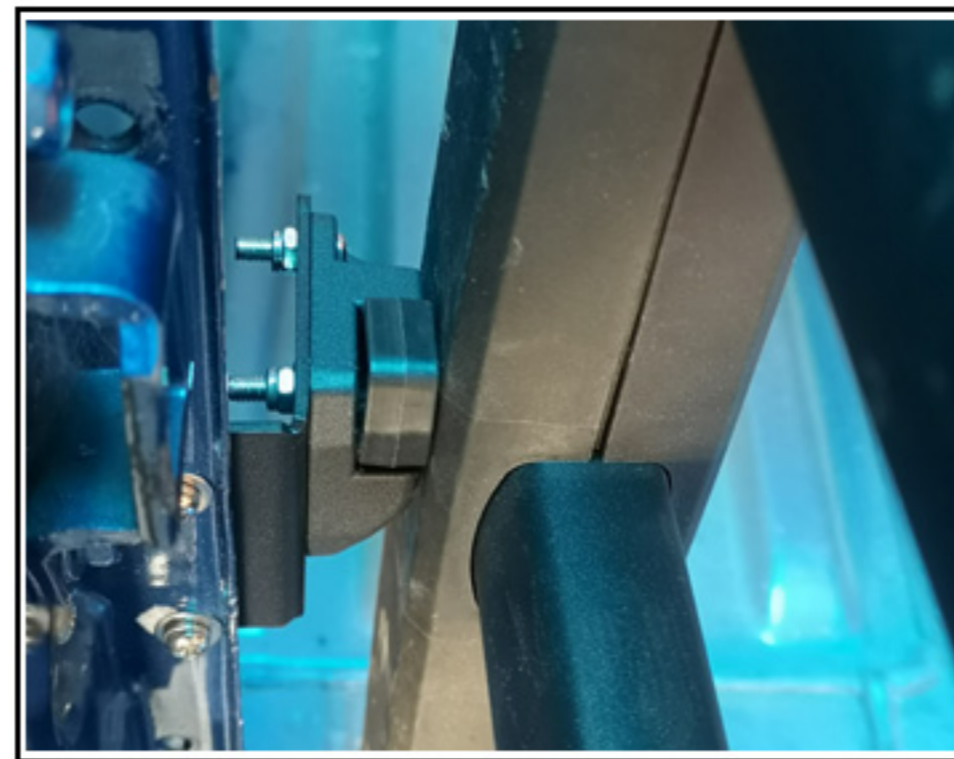

18. The installation is complete.