


STEEL SCOOTER CARRIER



THE PARTS BELOW HAVE BEEN INCLUDED FOR ASSEMBLY.

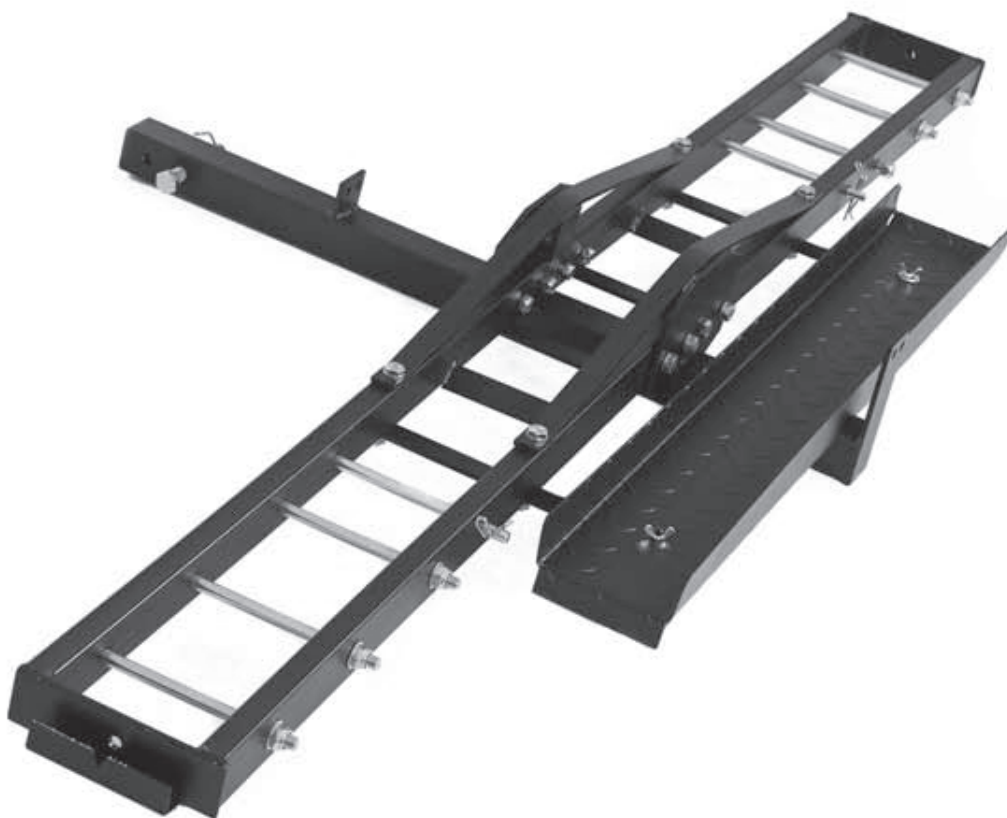

x1



x1



x2




x2



x2



x1

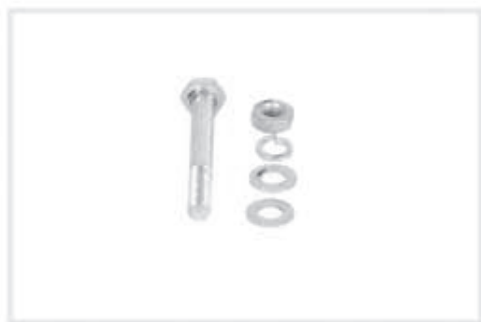

x4





x8



x8


STEP 1: You will need the parts displayed below to complete this step.

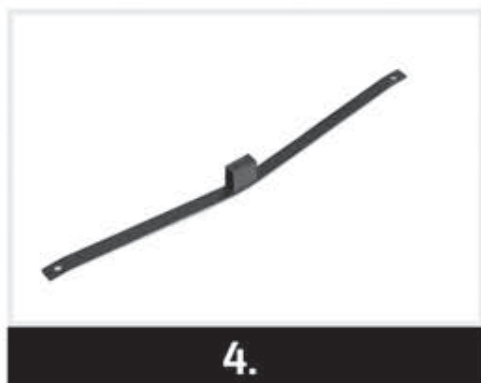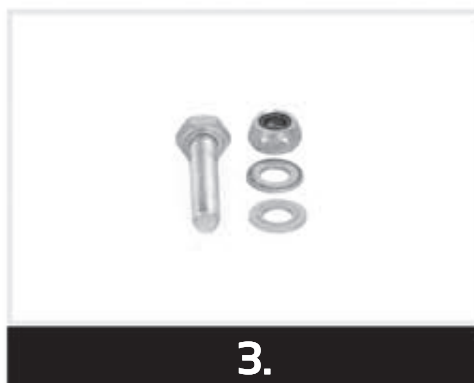

a Align the holes from part (1) & part (2) and insert the bolts & washers and tighten the hex nut (3) using a crescent wrench. Repeat on other side.


b Align holes from parts (2), (4) and (6) and insert bolts along with the washer split washer and hex nut (5). Repeat on other side

Tighten using a crescent wrench

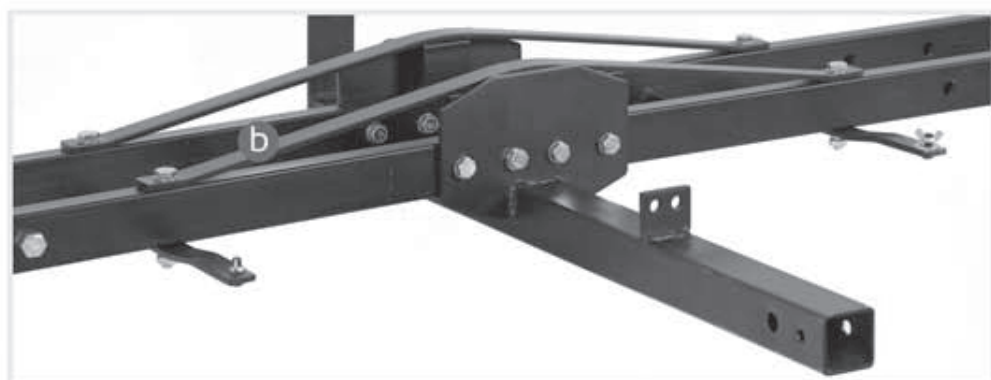

Continue to Step 2.

STEP 2: You will need the assembled part from Step 1 to continue.

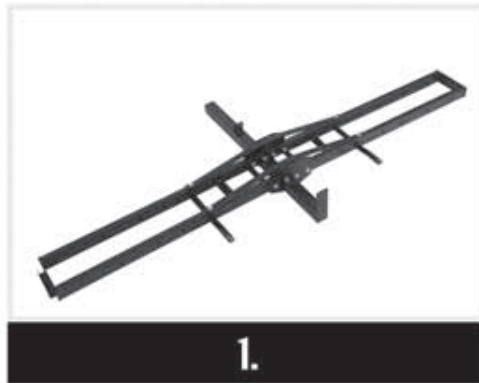

b Insert the bolts, washers and hex nuts (3) into the holes and repeat on the other side.

c Locate part (4) and align holes with the assembled unit. Tighten using wing nuts.

d Locate the final part (6) and insert into the end of the unit.

